



## ✓ ZERUST® ICT®510-C Multimetal VCI Film


ZERUST®/EXCOR® ICT®510-C VCI Multimetal Film provides cost-effective and versatile protection against corrosion damage for ferrous and non-ferrous metals in shipping and storage. It is available in various-sized rolls, sheets, tubing, and bags.

ZERUST® VCI packaging film diffuses proprietary ZERUST® VCIs (Vapor Corrosion Inhibitors) to protect metals for years. Use ZERUST® ICT®510-C VCI Multimetal Film to protect metal components, assemblies, and more with multiple metal types from rust and corrosion. For additional protection and use in challenging environments, packaging can be used with ZERUST® corrosion inhibitor liquid RPs and VCI diffuser products. Check with your ZERUST®/EXCOR® representative for a comprehensive corrosion management solution most effective for your metal assets.

ZERUST® is the inventor of poly VCI technology, and ZERUST® VCI film has proven its performance and safety\* with thousands of customers worldwide for almost 50 years. It is used to protect valuable metal items for manufacturers in industries such as automotive, agricultural, aerospace, and mining. ZERUST®/EXCOR® offers on-site support and service in more than 70 countries via a network of 21 joint venture partnerships.

### Application Example

ZERUST® VCI Multimetal Film Bag protects metals in shipping and storage from corrosion.

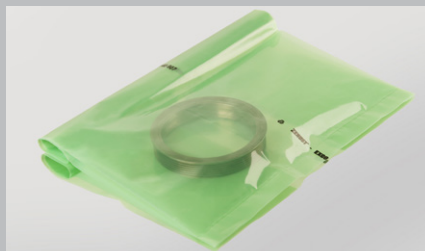

### ▶ Benefits


- Effective corrosion protection and packaging combined in one step
- Metals are ready for use and assembly directly out of the packaging
- Multiple metal-type protection
- Available with ESD protection
- Provides safe\* and effective ZERUST® VCI protection.
- Recyclable

### Application Type

- Storage
- Shipping
- Work in progress

\*Safe for people. This product does not pose a health hazard to users due to its classification as an article according to EU REACH, UN GHS, US OSHA HazCom, and CA WHMIS regulations.

## Product Information

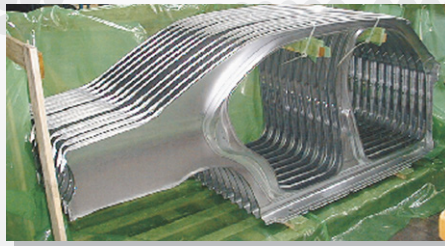

<b>Description</b>	ZERUST®/EXCOR® ICT®510-C Multimetal Film is a polyethylene product impregnated with vapor corrosion inhibitors.
<b>Protected Metal Types</b>	Best for items containing a combination of ferrous (steel, iron, and alloys) and non-ferrous (aluminum, copper, brass, bronze, and galvanized).
<b>Protection Duration</b>	Protects clean metals for years when used correctly and utilized within three years from receipt. Not intended for outdoor use.
<b>Storage</b>	Store in original packaging away from direct sunlight in conditions below 85°F (30°C) and 50% RH for up to 3 years from the date of shipment.

Property	Direction (Machine or Transverse)	ZERUST® ICT®510-C Film*	ASTM Test Method
Film Thickness	-	4 mil (102 µm)	D-6988
Dart Impact Resistance	-	300 g	D-1709
Tear Strength	MD	0.60 lb-f (2.7 N)	D-1938
	TD	0.65 lb-f (2.9 N)	
Tensile Strength at Yield	MD	1905 psi (13.1 MPa)	D-882
	TD	1538 psi (10.6 MPa)	
Tensile Strength at Break	MD	3045 psi (21.0 MPa)	D-882
	TD	2917 psi (20.1 MPa)	
Elongation at Break	MD	560%	D-882
	TD	610%	
Breaking Factor	MD	11.0 lb-f/in (1926 N/m)	D-882
	TD	11.5 lb-f/in (2014 N/m)	
Water Vapor Transmission Rate @78°F (26°C), 90% RH	-	0.06 g/(100 in²/day)	F-1249
Vapor Inhibiting Ability (VIA)	-	Pass	NACE TM0208

\* Typical values, not meant to be a specification.

### DECLARATION

This Data sheet and information it contains is considered to be accurate at the date of printing. No representation or warranty, expressed or implied is made as to the accuracy or completeness of the data and information contained in this publication. It is the User's obligation to evaluate and use products safely and within the scope advised in the data sheet and to comply with all applicable laws and regulations.

### LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on validations and tests conducted by Northern Technologies International Corporation/ZERUST® or its partners and are believed to be reliable, but the accuracy or completeness thereof is not guaranteed. We warrant our products will be free from defects when shipped to customer. Our obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Northern Technologies International Corporation/ZERUST® or its partners or agent of the claimed defect within 3 months after shipment of product to customer. Customer shall pay all freight charges for replacement products. We shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products. And any financial claims shall be limited to the value of the products sold. Before using, user shall determine the suitability of the product for its intended use, and user assumes all risk and liability whatsoever in connection therewith. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of the company. The foregoing warranty is exclusive and in lieu of all other warranties, express, implied or statutory, including without limitation any implied warranty of merchantability or of fitness for a particular purpose. In no case shall Northern Technologies International Corporation/ZERUST® be liable for incidental or consequential damages. For full warranty and disclaimer information visit, [www.zerust.com/warranty](http://www.zerust.com/warranty).

©2013-2023 Northern Technologies International Corporation (NTIC). All Rights Reserved. NTIC is the owner of the following trademarks: ActivPak®, Cor Tab®, EXCOR®, Flange Saver®, ICT®, Natur-VCI®, NTI®, Plastabs®, Z-CIS®, Zerion®, ZERUST®, 洁乐特, Z-PAK® and the Color "Yellow". ABRIGO®, UNICO®, and VALENO® are registered trademarks of EXCOR GmbH, a Joint Venture Partner of NTIC.

## Availability

ZERUST® ICT®510-C Film is available in many stock and custom option additive options such as UV and Anti Static. Contact a ZERUST® account manager for pricing and availability.

### Size Range (width):

Bags & Tubing:  
2" - 125" (flat)  
2" - 150" (gusset)  
Sheeting: 2" - 26'

## Recyclable

Dispose of in accordance with local, national, and international regulations. Check on options for recycling and incineration.

## Safety

- Safe for people. This product does not pose a health hazard to users due to its classification as an article according to EU REACH, UN GHS, US OSHA HazCom, and CA WHMIS regulations.
- ZERUST® VCI chemistry is safe for sensitive electronics. No galvanic effects, residues, or changes in the properties of metals. The protective molecules dissipate upon opening the package.

A product of:  
Northern Technologies  
International Corp  
4201 Woodland Road  
Circle Pines, MN 55014  
USA

Phone. +1 763.225.6600  
Fax. +1 763.225.6645  
[sales@zerust.com](mailto:sales@zerust.com)  
[www.zerust.com](http://www.zerust.com)